

## Miniature Peristaltic Pump

### RP-Q1




### Features

- Compact size: Dimensions of 30 mm X 12 mm X 14 mm
- Low Power consumption: only 0.12 W

### Specifications

Discharge Rate	0.45 ml/min $\pm$ 15 % (tap water at 20 °C)
Discharge Pressure	50 kPa
Tube Material	Silicone (I.D. 1.5 mm)
Motor	DC geared motor
Rated Voltage	DC 3 V
Power Consumption	0.12 W
Weight	11 g

### Dimensions

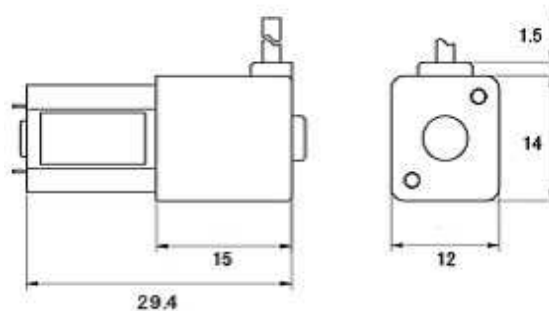

Note: Details including specifications etc. may be changed at any time without notice.

**TAKASAGO ELECTRIC, INC.**

66 KAKITSUBATA, NARUMI-CHO, MIDORI-KU, NAGOYA, 458-8522 JAPAN

Tel +81-52-891-2301 Fax+81-52-891-7386

E-mail: [info@takasago-elec.co.jp](mailto:info@takasago-elec.co.jp) URL: <http://www.takasago-elec.com>